


Classification Item

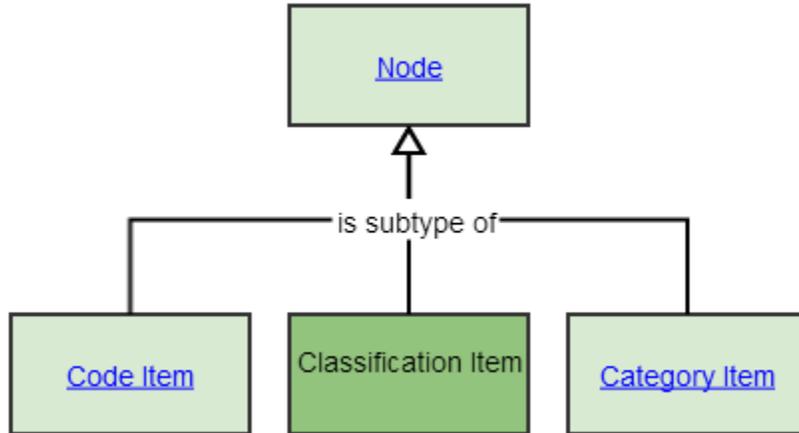

Definition

Object	Group	Definition	Explanatory Text	Synonyms
Classification Item	Concepts	A <i>Classification Item</i> represents a <i>Category</i> at a certain <i>Level</i> within a <i>Statistical Classification</i> . It defines the content and the borders of the <i>Category</i> . A <i>Unit</i> can be classified to one and only one item at each <i>Level</i> of a <i>Statistical Classification</i> .		

Attributes

Name	Description	Cardinality	Value Domain
Name		0..1	Text
Description		0..1	Text
Code	A <i>Classification Item</i> is identified by an alphabetical, numerical or alphanumerical code, which is in line with the code structure of the classification <i>Level</i> . The code is unique within the <i>Statistical Classification</i> to which the item belongs.	1..1	Textual

Official name	A Classification Item has a name as provided by the owner or maintenance unit. The name describes the content of the category. The name is unique within the Statistical Classification to which the item belongs, except for categories that are identical at more than one level in a hierarchical classification.	1..1	Textual
Alternative names	A Classification Item can be expressed in terms of one or several alternative names. Each alternative name is associated with a name type.	0..n	Textual
Explanatory notes	<p>A Classification Item may be associated with explanatory notes, which further describe and clarify the contents of the Category. Explanatory notes consist of:</p> <p>General note: Contains either additional information about the Category, or a general description of the Category, which is not structured according to the "includes", "includes also", "excludes" pattern.</p> <p>Includes: Specifies the contents of the Category.</p> <p>Includes also: A list of borderline cases, which belong to the described Category.</p> <p>Excludes: A list of borderline cases, which do not belong to the described Category. Excluded cases may contain a reference to the Classification Items to which the excluded cases belong.</p>	0..1	Textual
Level number	The number of the <u>Level</u> to which the item belongs.	1..1	Numeric
Generated	Indicates whether or not the item has been generated to make the level to which it belongs complete.	0..1	Binary

Currently valid	If updates are allowed in the Statistical Classification, an item may be restricted in its validity, i.e. it may become valid or invalid after the Statistical Classification has been released. Indicates whether or not the item is currently valid.	0..1	Binary
Valid from	Date from which the item became valid. The date must be defined if the item belongs to a floating Statistical classification.	0..1	Date
Valid to	Date at which the item became invalid. The date must be defined if the item belongs to a floating Statistical classification and is no longer valid.	0..1	Date
Future events	The future events describe a change (or a number of changes) related to an invalid item. These changes may e.g. have turned the now invalid item into one or several successor items. This allows the possibility to follow successors of the item in the future.	0..n	Textual
Changes from previous version of the Statistical Classification	Describes the changes, which the item has been subject to from the previous version to the actual Statistical Classification.	0..1	Textual
Updates	Describes the changes, which the item has been subject to during the life time of the actual Statistical Classification.	0..1	Textual
Parent item	The item at the next higher level of the classification Statistical Classification of which the actual item is a sub item.	0..1	Identifier
Sub items	Each item, which is not at the lowest level of the Statistical Classification, might contain one or a number of sub items, i.e. items at the next lower level of the Statistical Classification.	0..n	Identifier
Linked items	Items of other classification versions or variants with which the item is linked, either as source or target, through Correspondence Tables.	0..n	Identifier
Case laws	Refers to identifiers of one or more case law rulings related to the Classification Item.	0..n	Textual

Case law descriptions	Refers to descriptions of the above case laws	0..n	Textual
Case law dates	Refers to date of above case laws	0..n	Date